

FLO-KWIP

AL45 & AL75

PUDDLE SUCKER DATA SHEET



FEATURES


Puddle sucker submersible pump for rental, contractors, builders and concreters, with additional new high performance model.

- Pumps down to only 3mm
- Stainless steel outer case for low weight and effective cooling
- Hytrel coated, semi-open impeller and Nitrile rubber volute liner for excellent abrasion resistance
- Double mechanical seal with SilCarb primary
- Rubber base
- Standard with 10m power cable
- 50mm / 2" MBSP threaded discharge
- Thermal protection on motor

SPECIFICATIONS

KW:	0.37 0.75
V:	240V
Hz:	50Hz
Max Flow:	205L/min 320L/min
Max Head:	11m 17m
Weight: (w/o cable)	10.2kg 14.5kg
Height:	347mm 372mm
Diameter:	214mm
FLA:	3A 6.3A
Protector:	Auto-cut
Max Fluid Temp:	40 °C
Max Operating Subm. Depth:	10m

PERFORMANCE CURVE

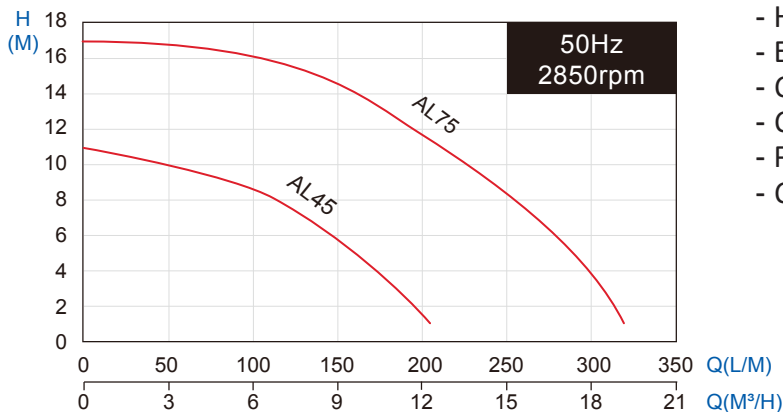

APPLICATIONS

- Hire / Rental
- Basements and Cellars
- Contractors
- Construction
- Plumbers
- Concreters

*Specifications subject to change without notice

For more information contact Toolkwip Pumps!

P: +61 3 8805 0500
F: +61 3 9801 0299
E: sales@toolkwippumps.com
www.toolkwippumps.com

